


EXPLORE THE RANGE

TECHNICAL PARAMETERS


		SWL 2830	SWL 3230	SWL 4038	SWTL 4538
PERFORMANCE	Operating weight	2 830 kg	3 500 kg	3 700 kg	4 400 kg
	Rated operating capacity	750 kg	1 100 kg	1 300 kg	1 200 kg
	Tipping load	1 500 kg	2 200 kg	2 600 kg	3 430 kg
	Breakout force curl	2 000 kg	2 480 kg	3 450 kg	3 385 kg
	Breakout force lift	1 900 kg	2 430 kg	2 600 kg	2 600 kg
	Travel speed	13 km/h	12.6 km/h	12-18 km/h	7.8-13 km/h
DIMENSIONS	Overall dimension [L × W × H] (standard bucket)	3 307 × 1 600 × 2 014 mm	3 724 × 1 830 × 2 068 mm	3 735 × 2 015 × 2 068 mm	3 750 × 2 015 × 2 071 mm
	A Maximum overall height	3 850 mm	4 020 mm	4 110 mm	4 079 mm
	B Bucket pin height at maximum lift	3 002 mm	3 123 mm	3 214 mm	3 222 mm
	C Height to top of cab	2 014 mm	2 068 mm	2 068 mm	2 071 mm
	D Height to bottom of level bucket	2 834 mm	2 948 mm	3 044 mm	3 044 mm
	E Length without bucket	2 604 mm	2 965 mm	2 984 mm	2 969 mm
	F Length with bucket on ground	3 307 mm	3 724 mm	3 735 mm	3 750 mm
	G Maximum dump angle	42 deg	43 deg	41 deg	44deg
	H Clearance at maximum lift and dump	2 320 mm	2 395 mm	2 493 mm	2 467mm
	I Reach at maximum lift and dump	475 mm	625 mm	915 mm	891 mm
	J Rack back angle bucket on the ground	30 deg	30 deg	30 deg	30 deg
	K Rack back angle at maximum height	97 deg	93 deg	89 deg	97 deg
	L Wheelbase	996 mm	1 148 mm	1 188 mm	1 600 mm
	M Ground clearance	212 mm	205 mm	237 mm	228 mm
	N Departure angle	25 deg	26 deg	28 deg	34 deg
	O Turning radius from center - Coupler	1 235 mm	1 344 mm	1 328 mm	1 368 mm
	P Turning radius from center - Bucket	1 953 mm	2 201 mm	2 254 mm	2 253 mm
	Q Turning radius from center - Machine rear	1 531 mm	1 747 mm	1 751 mm	1 744 mm
	R Bumper overhang behind rear axle	1 001 mm	1 159 mm	1 127 mm	855 mm
	S Width over tires	1 293 mm	1 475 mm	1 474 mm	1 950 mm
	T Bucket width	1 600 mm	1 830 mm	2 015 mm	2 015 mm
	U Track length	-	-	-	2 100 mm
ENGINE	Brand	KUBOTA	KUBOTA	KUBOTA	KUBOTA
	Model	V2403-CR-TE4B	V3307-CR-TE5B	V3307-CR-TE5B	V3307-CR-TE5B
	Type	Diesel, 4 cylinders, water cooled	Diesel, 4 cylinders, water cooled	Diesel, 4 cylinders, water cooled	Diesel, 4 cylinders, water cooled
	Emission rating	EU Stage V	EU Stage V	EU Stage V	EU Stage V
	Output	47.9/2 700 kW/rpm	54.6/2 600 kW/rpm	54.6/2 600 kW/rpm	55.4/2 600 kW/rpm
	Max torque	198.5/1 600 N*m/rpm	265/1 500 N*m/rpm	265/1 500 N*m/rpm	265/1 500 N*m/rpm
TRACK	Type	-	-	-	Rubber track
	Rubber shoe width	-	-	-	450 mm
ELECTRICAL SYSTEM	Starter	12V/2.0 kW	12V/3.0 kW	12V/3.0 kW	12V/3.0 kW
	Alternator rating	12V/60A	12V/80A	12V/80A	12V/80A
	Battery	120 Ah	120 Ah	120 Ah	120 Ah
HYDRAULIC SYSTEM	Hydraulic flow (standard)	65 L/min	84 L/min	89 L/min	90 L/min
	Hydraulic flow (high)	95 L/min	125 L/min	130 L/min	130 L/min
	Hydraulic pressure (standard)	21 Mpa	21 Mpa	21 Mpa	21 Mpa
HYDRAULIC OIL TANK CAPACITY		23 L	33 L	34 L	40 L
FUEL TANK CAPACITY		75 L	110 L	95 L	90 L

DIMENSIONS

TRACKED

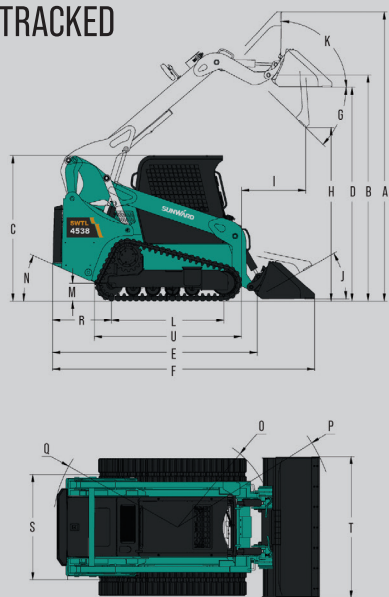

WHEELED

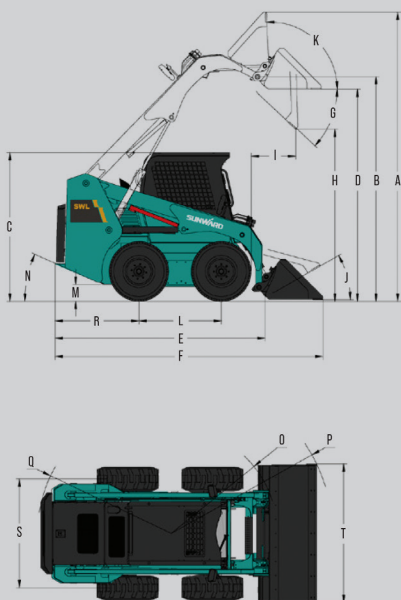

EQUIPMENT

THE STANDARD AND OPTIONAL EQUIPMENT VARIES FROM COUNTRY TO COUNTRY.
FOR MORE INFORMATION, PLEASE CONTACT US.

		STANDARD EQUIPMENT	OPTIONAL EQUIPMENT
CAB	FOPS/TOPS cab	●	
	Safety armrest	●	
	Adjustable seat	●	
	Mechanical suspension seat	●	
	Centralised panel	●	
	Double accelerator control system	●	
	Pilot control operating system	●	
	Fan heater	●	
	Air conditioning	●	
FRONT WORKING DEVICES	Lift cylinder safety bar	●	
	Standard quick coupler		●
	Standard bucket	●	
	Four-in-one bucket		●
	Pallet fork		●
	Standard tires	●	
HYDRAULIC SYSTEM	Solid tires		●
	Boom emergency descent	●	
	Hydraulic auto-level system	●	
	Closed hydrostatic travelling system	●	
	Standard or high flow hydraulic system	●	
	Lift cylinder safety bar	●	
ELECTRICAL SYSTEM	2-speed		●
	Front LED working light	●	
	Warning beacon light	●	
	Travelling alarm system (backward)	●	
	Horn	●	
	Attachment electronic control system	●	
OTHERS	Rear LED working light		●
	Additional counter weight		●